



master carton

USER  
MANUAL



PACKAGE

#### PRODUCT DESCRIPTION



- The portable refrigerator is used to cool food products.
- Thanks to high-class insulation and an efficient compressor, the cooling process is extremely fast.
- The device has two cooling chambers equipped with separate Dual-Zone temperature control.
- Possibility to increase the volume of the cooling chamber by removing the partition wall.
- The refrigerator can be powered by DC (12/24V), AC (100-240V), battery modular Yolco and/or external battery Yolco( not included) or using a solar panel (not included).
- The device has multi-level discharge protection for the vehicle battery and overvoltage protection that protects it against sudden voltage surges in the electrical network.
- The control panel with a clear LED screen enables intuitive control of the device.
- The fridge is equipped with a Bluetooth 5.0 transmitter. This allows you to control it using an application designed for mobile devices (Android / iOS).
- Built-in USB socket allows you to charge external devices such as a smartphone or tablet.
- Ergonomic handles and wheels enable comfortable movement of the device.
- The internal baskets makes it easier to remove and manage the contents of the refrigerator.

#### SPECIFICATION

- Total capacity: 50 L (11.0 gal)
- Total capacity (compartment partition removed): 52 L (11.4 gal)
- Left compartment net capacity: 40 L (8.8 gal)
- Right compartment net capacity: 10 L (2.2 gal)
- Power specification: DC 12V/5A, 24V/2.5A, AC 100-240V, 50-60Hz, max 1.2A, PV 12-50V/10A
- Average battery life (battery: 15600mAh; 11.1V; 173Wh / full compartment / temperature inside: +5°C/ ambient temperature: +25°C): MAX mode – 3h, 10min, ECO mode – 5h, 45min
- USB socket: 5V/1A
- Number of cooling compartments: 2
- Cooling temperature range: from +20°C to -20°C (from +68°F to -4°F)
- Power consumption: 60W
- Climate class: N, T, SN, ST
- Ambient temperature: from +10°C to +43°C (from +50°F to +109,4°F)
- Emitted noise level: 45dB
- Refrigerant: R1234YF (40g)
- GWP: 4
- Connectivity: Bluetooth 5.0 (working range up to 10 m/32,8 ft)
- Frequency range: 2402 MHz – 2480 MHz
- Maximum radio frequency power: 2 dBm
- Dimensions (W x H x D): 753 x 490 x 400 mm (29.6 x 19.3 x 15.7 in)
- Net weight: 15.3 kg (33.7 lb)
- Gross weight: 21.2 kg (46.7 lb)

#### CONTENTS OF THE PACKAGE

- Portable compressor refrigerator
- 12/24V power cord (length: 3.5m/11,4ft)
- AC/DC adapter with 100-240V power cord (EU/UK)
- User manual

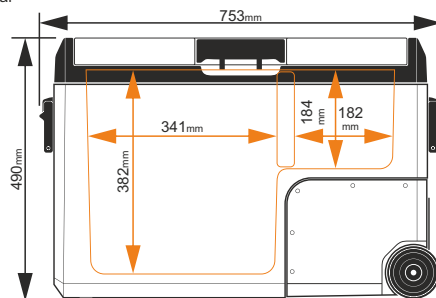

MODEL	TCX50 CARBON
Single item dimension (including package)	80,8(W) x 55,2(H) x 49,2cm(D)
Weight of single item (including package)	16,5kg
Material	-
Available colours	1
Quantity in master carton	1
Dimension of master carton	82,5(W) x 57,7(H) x 50,9cm(D)
Weight of master carton	21,2kg
Quantity on europalette (120x14x80cm)	6



EAN code: 5902721195827

TCX50 CARBON



5 902721 195827